

READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION

NOTICE:

Fuelpak is intended for racing use only, and is not legal for sale or use in California on pollution-controlled vehicles.

TOOLS NEEDED

#1 Phillips
4 & 6 mm Allen
10, 12mm Socket
3/8" Ratchet



2009-11 Suzuki M50 & C50
Fuel Injected Models

INSTALLATION INSTRUCTIONS FOR P/N 62019




INTRODUCTION: Congratulations on your purchase of the Fuelpak Fuel Management System for fuel injected Honda Fury VTX 1300CX motorcycles. Please take the time to read the entire instruction manual before attempting to install. DO NOT adjust the Fuelpak until you have thoroughly read the instruction manual and the unit is fully installed. If you have questions, please call (562) 921-0071.

SUMMARY: To achieve the optimum performance from your application, it is recommended that you install a high performance air filter in conjunction with this unit. The Fuelpak will be installed in-line the factory injector wiring harness. The Fuelpak will be mounted under the rider seat.

PLEASE NOTE: FUELPAK USE REQUIRES A HIGH PERFORMANCE AIR FILTER.

FUEL INJECTION MANAGEMENT SYSTEM


1. Remove rider and passenger seat.
2. Remove fuel tank. We highly recommend you consult the factory service manual for proper removal of fuel tank.
3. Remove fuel tank rear mounting bracket.
4. Remove four (4) bolts securing bracket to frame under fuel tank rear mounting bracket.
5. Route wiring harness from under seat between the frame by fuel tank rear mounting bracket and up left side of the engine. (FIG. #1)
6. Unplug the TPS connector (black) and connect the two white 3-pin connectors in-line with the factory TPS connector.(FIG. 2)
7. Disconnect the factory connector from rear injector and connect to Fuelpak connector. (FIG.3) 4839.
8. Route black wire to battery negative connection as shown. (Fig. 4836)
9. Attach Fuelpak to Fuelpak harness and mount next to battery with velcro. Fig 4836
10. Follow the service manual to reinstall the fuel tank.
11. You are now ready to set-up your Fuelpak.
12. Remove Fuelpak clear case cover by removing all four screws, save hardware.

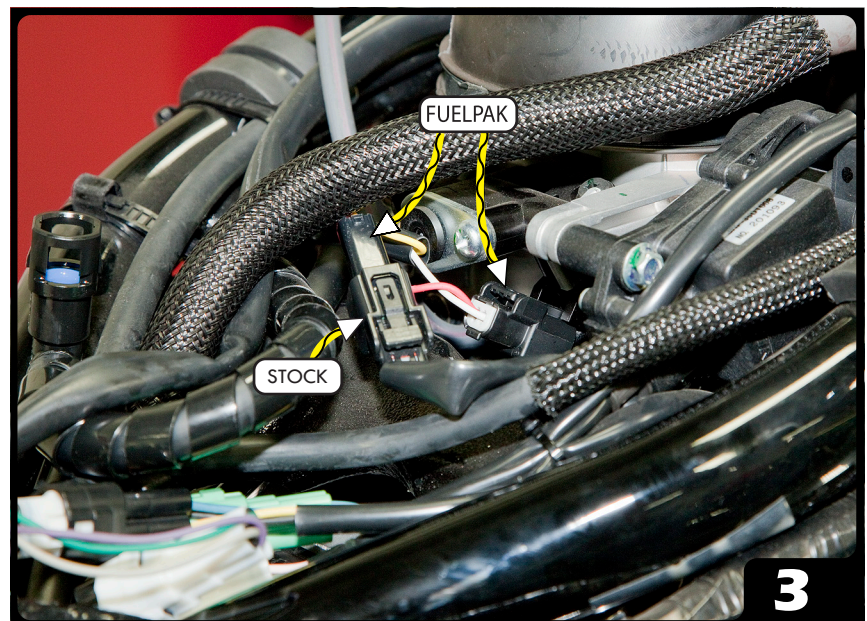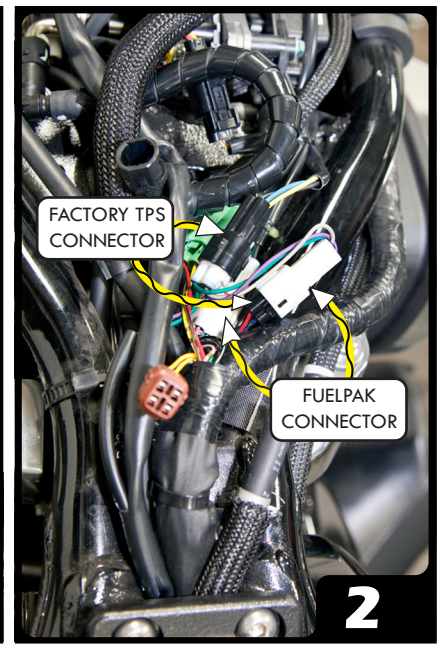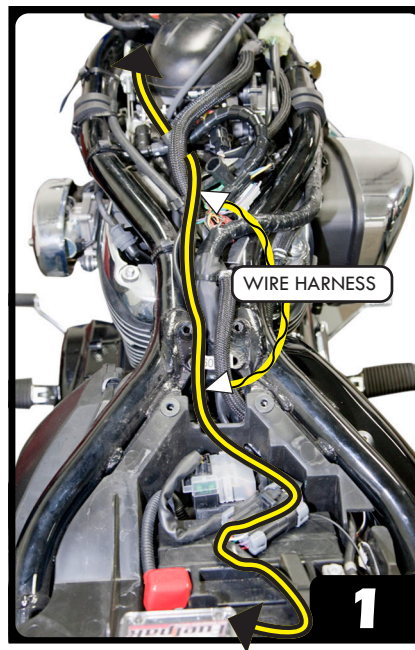

READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION



HOW IT WORKS

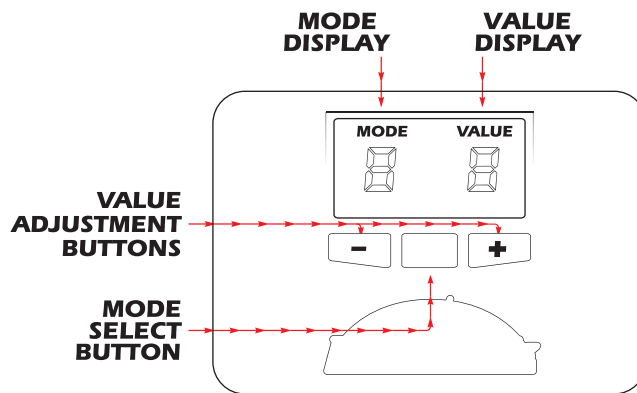

ENTERING VALUES

1. Turn on main power and handlebar switches, and start engine. Fuelpak display should light up, if not, turn power off and verify the connectors are fully seated.
2. Refer to Fuelpak Setting Reference to locate the Setting Values specific to your bike and exhaust system. If you do not find your setting, visit fuelpakfi.com or call tech support at (562) 921-0071.
3. Starting with mode 1 selected, press the value (+) or the value (-) buttons to input the correct value as indicated in your Setting Value. After entering your first value, press the mode select button to move to mode 2 and enter the value. Continue until you have entered the value for each of the first 18 mode positions. Each time the value (+) is pressed; the value increases by one number. Each time the value (-) is pressed; the value decreases by one number. (Please refer to the "How It Works" section directly above if you have questions about this step.
4. As the next procedure, after you have entered in your values for the first 18 modes, press the mode select button to move to mode 19. Fully twist open the throttle and return to idle position to calibrate the Fuelpak to your bike.
5. Press the mode select button to move to mode 21 and verify that it reads "0" with the throttle closed, and that the numbers increase as you roll on the throttle.
6. Enter any other mode values as required for your application.
7. Turn power off.
8. Reinstall clear cover and attach Fuelpak using supplied Velcro to the top of the battery.
9. Reinstall seats.
10. You are now ready to ride.

IN THE EVENT OF A MALFUNCTION, PLEASE CHECK THE FOLLOWING

TECH SUPPORT

1. Turn off main and handlebar switches then verify all connectors are fully seated.
2. Be sure setting values are correct for your application.
3. Verify throttle calibration, step 5 in Entering Values.
4. Check harness for cuts, scrapes or abrasions.
5. Make sure the battery is fully charged and the charging system is operating correctly.
6. Call technical support at (562) 921-0071

WARRANTY INFORMATION

WARRANTY: Your Fuelpak unit is warranted against defects in materials and workmanship for the period of 90 days from the original retail purchase. In the event of an alleged defect in material or workmanship, Fuelpak's responsibility is strictly limited to repair or replace the defective product. Fuelpak shall not be responsible for (a) labor, transportation, or other incidental charges; (b) consequential or other damages incurred by use of any product. Fuelpak offers no other warranty beyond this limited warranty. This limited warranty does not apply to products which have been (a) modified or altered in any way; (b) subjected to adverse conditions, such as misuse, neglect, accident, improper installation or adjustment, contaminants, corrosion, or faulty repair;

or (c) used in applications other than those recommended by Fuelpak. To initiate a warranty process, the consumer must first call technical support to receive a return authorization number. The product must be returned to Fuelpak complete with a dated receipt and a return authorization number.

Fuelpak
Attn: Warranty Claims
13861 Rosecrans Avenue
Santa Fe Springs, CA 90670
(562) 921-0071